

# 689G Telescopic Handler Service Manual 7-88730

## Table of Contents

Description	Section No.	Form No.
<b>General</b>		
	<b>Tab 1</b>	
Section Index - General		7-90040
Safety, General Information	1001	7-88740
General Specifications and Torques	1002	7-88750
<b>Engine</b>		
	<b>Tab 2</b>	
Section Index-Engine		7-90050
Diesel Engine	2000	7-88760
Engine and Transmission Removal and Installation	2001	7-88770
<b>Fuel System</b>		
	<b>Tab 3</b>	
Section Index-Fuel System		7-90060
Fuel System and Filters	3410	7-88780
<b>Electrical</b>		
	<b>Tab 4</b>	
Section Index - Electrical		7-90070
Electrical General Information	4000	7-88790
Electrical Schematics and Troubleshooting	4001	7-88800
Electrical Gauges and Senders	4005	7-88810
<b>Steering</b>		
	<b>Tab 5</b>	
Section Index - Steering		7-90080
How It Works	5000	7-88820
Steering Specifications	5001	7-88830
Steering Troubleshooting	5002	7-88840
Steering Pump and Steering Column	5003	7-88850
Steering Selector Valve	5004	7-88860
Steering Cylinders	5005	7-88870
<b>Power Train</b>		
	<b>Tab 6</b>	
Section Index - Power Train		7-90090
How It Works	6000	7-88880
Removal and Installation of Power Train Components	6001	7-88890
Transmission Specifications, Pressure Checks and Troubleshooting	6002	7-88900
Drive Axle	6004	7-88910

**CASE CORPORATION**  
700 State Street  
Racine, WI 53404 U.S.A.

**CASE CANADA CORPORATION**  
450 Sherman Avenue  
Hamilton, ON L8N 4C4 CANADA

Bur 7-88730


© 1999 Case Corporation  
Printed in U.S.A.  
June, 1999

# 689G Telescopic Handler Service Manual 7-88730

## Table of Contents

Description	Section No.	Form No.
<b>Brakes</b>	<b>Tab 7</b>	
Section Index - Brakes		7-90100
How It Works	7000	7-88920
Brake System Checks, Adjustments and Specifications	7001	7-88930
Removal and Installation of Brake Components	7002	7-88940
Brake Troubleshooting	7003	7-88950
Parking Brake	7008	7-88960
<b>Hydraulics</b>	<b>Tab 8</b>	
Section Index - Hydraulics		7-90110
How It Works	8000	7-88970
Removal and Installation of Hydraulic Components	8001	7-88980
Hydraulic Troubleshooting, Checks/Adjustments and Specifications	8002	7-88990
Hydraulic Cylinders	8006	7-89000
Hydraulic and Fuel Tanks	8007	7-89010
<b>Mounted Equipment And Chassis</b>	<b>Tab 9</b>	
Section Index - Mounted Equipment and Chassis		7-90120
How It Works	9000	7-89020
Troubleshooting, Checks/Adjustments and Specifications	9001	7-89030
Removal and Installation of Boom Components	9005	7-89040
Removal of Hoods	9006	7-89050
Electrical Schematic and Hydraulic Schematic Foldout - 689G		7-15440

**NOTE:** Case Corporation reserves the right to make improvements in design or changes in specifications at any time without incurring any obligation to install them on units previously sold.

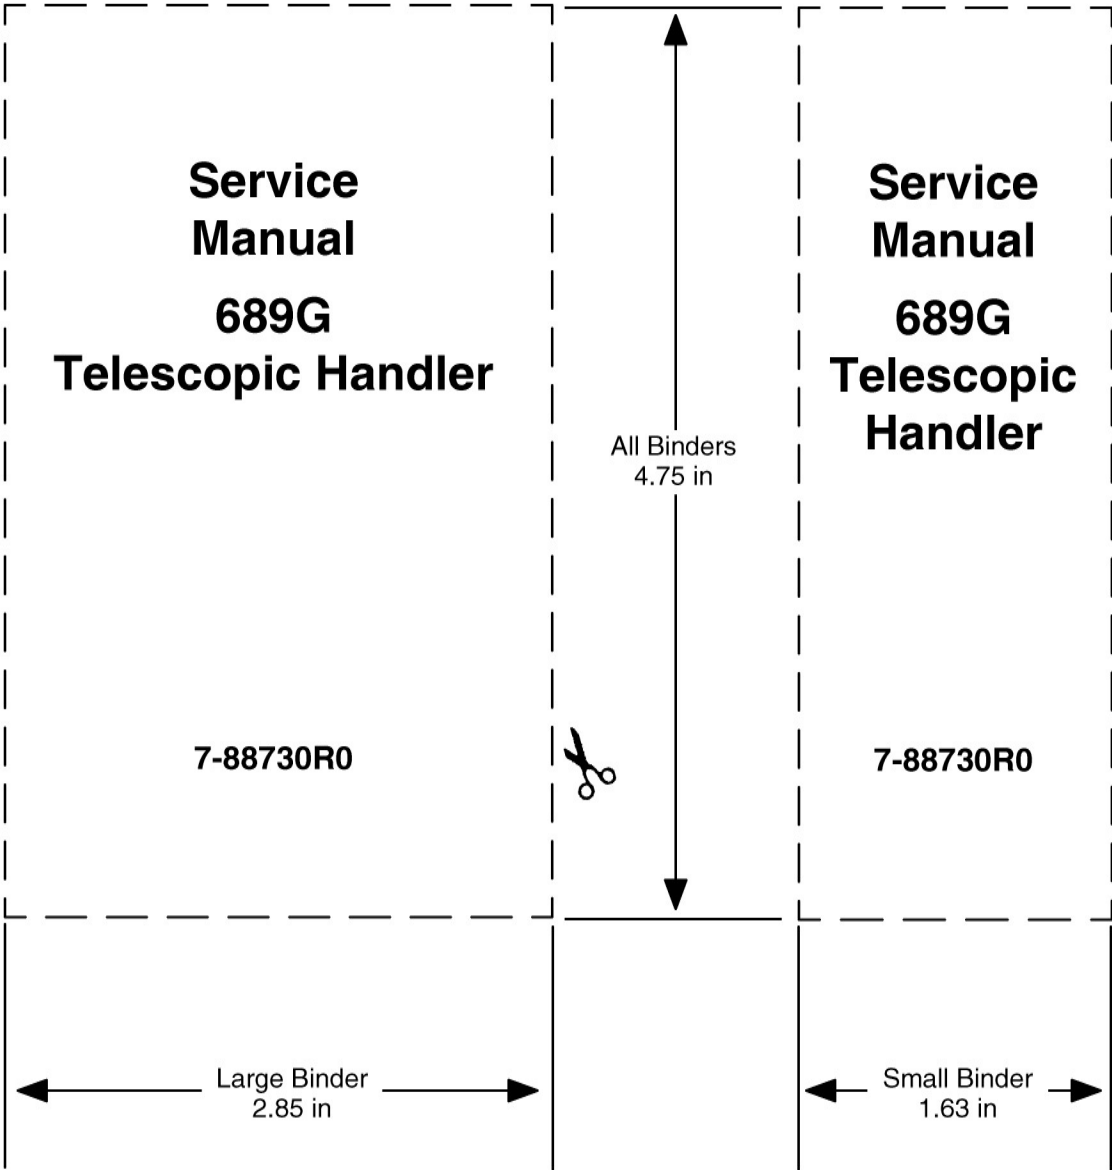



# SECTION INDEX - GENERAL

<b>Section Title</b>	<b>Section Number</b>
Safety, General Information.....	1001
General Specifications and Torques .....	1002

**CASE CORPORATION**  
700 State Street  
Racine, WI 53404 U.S.A.

**CASE CANADA CORPORATION**  
450 Sherman Avenue  
Hamilton, ON L8N 4C4 CANADA

Bur 7-90040

© 1999 Case Corporation  
Printed in U.S.A.  
June, 1999



# Section 1001

## SAFETY AND GENERAL INFORMATION

**CASE CORPORATION**  
700 State Street  
Racine, WI 53404 U.S.A.

**CASE CANADA CORPORATION**  
450 Sherman Avenue  
Hamilton, ON L8N 4C4 CANADA

Bur 7-88740

© 1999 Case Corporation  
Printed in U.S.A.  
June, 1999

# TABLE OF CONTENTS

SAFETY INFORMATION .....	3
Understanding Signal Words .....	3
Engine Safety .....	4
Electrical Safety .....	5
Hydraulics Safety .....	5
Service Cleanliness .....	5
<i>Removal and Installation</i> .....	6
Disassembly and Assembly .....	6
Hydraulic System and Component Service .....	7
Electrical System .....	7
GENERAL INFORMATION .....	8

**NOTE:** Case Corporation reserves the right to make improvements in design or changes in specifications at any time without incurring any obligation to install them on units previously sold.



## SAFETY INFORMATION



### SAFETY ALERT SYMBOL

This is the Safety Alert Symbol. When you see this symbol in this manual, be alert to the potential for personal injury.

Follow recommended precautions and safe operating practices.

### Understanding Signal Words

A signal word - WARNING - is used with the safety-alert symbol.

DANGER, WARNING, or CAUTION safety labels are located near specific hazards.

NOTE labels are for general information.

#### DANGER

DANGER IS USED TO INDICATE THE PRESENCE OF A HAZARD WHICH WILL CAUSE SEVERE PERSONAL INJURY OR DEATH IF THE WARNING IS IGNORED.



WARNING IS USED TO INDICATE THE PRESENCE OF A HAZARD WHICH CAN CAUSE SEVERE INJURY OR DEATH IF THE WARNING IS IGNORED.

#### CAUTION

CAUTION IS USED TO INDICATE THE PRESENCE OF A HAZARD WHICH WILL OR CAN CAUSE PERSONAL INJURY, OR PROPERTY DAMAGE IF THE WARNING IS IGNORED.

#### NOTE

NOTE is used to notify people of installation, operation, or maintenance information which is important but not hazard related.

### General Safety Guidelines

Accidents are caused by failure to follow simple, fundamental safety rules and precautions. Most accidents can be avoided by paying attention, using common sense, and following instructions.

**WARNING:** *Improper maintenance can be hazardous.*



*Read and understand SECTION 1001, SAFETY AND GENERAL INFORMATION before performing any maintenance, service, or repairs.*


M622

Study the operator's manual and service manual before starting, operating, maintaining, fueling, or servicing the 689G Telescopic Handlers.

Keep hands and fingers from between small parts. Wear protective gear such as safety glasses, heavy gloves, and safety shoes.

No unauthorized person should be allowed to operate, service, or maintain this material handler. Do not perform any work on the equipment that is unauthorized.

Read and understand all unit mounted safety labels before starting, operating, maintaining, fueling, or servicing this unit.

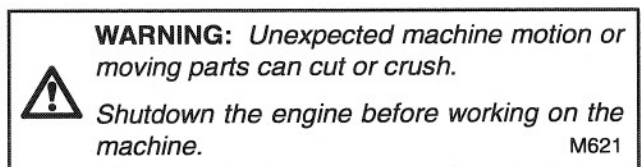

M621

Always make sure that the parking brake is set and the engine is shut down before starting any maintenance or service procedures.

Disconnect the battery and tag all controls according to OSHA requirements to warn that work is in progress.

Always wear proper safety equipment as required for the job. Consult your supervisor for specific job related safety equipment requirements.

Do not wear rings, watches, jewelry, or loose or hanging apparel, such as ties, torn clothing, scarves, unbuttoned or unzipped jackets, or anything else that could possibly get caught up in moving parts. Long hair must be tied back or otherwise secured.

Keep the maintenance area clean and dry. Remove water or oil slicks immediately.

Be sure all mechanics tools are in good condition. Do not use tools that are extremely worn out, rounded out, mushroomed, or loose. Always wear safety glasses with side shields.



**WARNING:** *Never use gasoline, naphtha or any other volatile material for any cleaning purposes. These materials may be toxic and/or flammable.*

M138

Take extra care around all flammable substances. Diesel fuel, gasoline, starting fluid, and battery gases are highly flammable and should be kept away from extreme heat and open flames, as well as out of areas where fumes may accumulate.

Do not permit any open flame or spark near the material handler when refueling or handling highly flammable materials.

Do not pile oily, greasy rags together. They are a fire hazard and should be kept in an OSHA approved container.

When using compressed air for cleaning parts, always wear safety glasses with side shields or goggles. Limit the pressure according to OSHA.

Do not use controls or hoses as a hand-hold when climbing into the cab of the handler. They are not stable and do not provide solid support. Controls may also move causing accidental or dangerous machine movement.

Never climb on, stand up, or climb off the handler while it is in motion. Do not jump on or off the handler. Always use the three point contact method. Keep two hands and one foot, or two feet and one hand in contact with the steps and grab rails at all times.

Keep the operator's platform, steps, grab-rails and handles clean of foreign objects, oil, grease, mud, or other accumulations to minimize the dangers of slipping or stumbling. Keep the operator's platform clear of all loose objects.

Never attempt to operate the machine from any other position than the operator's platform. Lift and handle all objects using proper lifting techniques, or with a lifting device if they are heavy.



**WARNING:** *Danger of falling components.*

*Remember, the capacity of an eyebolt diminishes as the angle between the supporting members and the object becomes less than 90 degrees.*

*Eyebolts and brackets must never be bent and should only have stress in tension.* M645

Use only designated towing or pulling attachment points. Use care when attaching towing devices. Be sure all pins and locks as provided are in place and secure. Stay clear of drawbars, cables, any other towing device when moving the material handler.

Do not adjust anything on the machine with the engine running unless directly specified by service/maintenance procedures.

When making checks that require running the engine, have an operator at the operator's station with the mechanic in sight at all times if possible. Keep clear of moving parts. Stop the engine before making adjustments.

Before starting the machine be sure the area is clear. Sound the horn.

Never put head, body, limbs, feet, fingers, or hands near any moving parts.

## Engine Safety



**WARNING:** *Injury can occur when removing the radiator cap.*

*Steam or fluid escaping from the radiator can burn. Rust inhibitor contains alkali; avoid contact with skin and eyes.*

*Always shut down the engine and allow to cool down before removing the radiator cap. Remove the cap slowly to relieve pressure. Avoid contact with steam or escaping fluid.*

M646

Slowly turn the radiator cap to relieve built up pressure before removing. Add coolant only when the engine is stopped or idling.

Do not run the engine while refueling. Use care if the engine is hot due to increased possibility of fire from spilled fuel.

Never attempt to lubricate the unit while the engine is running.



**WARNING:** *Engine damage. Raw, unfiltered air can cause engine damage.*

*Never service the air cleaner while the engine is running.*

M647

Avoid running the engine with unprotected air inlets. If such running is unavoidable for service reasons, place protective screening over the inlets before running the engine.



**WARNING:** *Some illustrations in this manual may show guards or cover panels removed for purposes of clarity.*

*Always replace guards and cover panels before operation.*

M648

Ensure that all guards and shields are properly installed.

Disconnect the negative battery cable before doing any maintenance or repair on electrical circuits.

Disconnect the negative battery cable on internal combustion handlers.

Do not run the engine in a closed environment without proper exhaust ventilation.

## Electrical Safety

Always turn engine OFF before servicing the machine.

Disconnect the negative battery cable before servicing the electrical system or when welding on the machine.



**WARNING:** *Batteries give off fumes that can explode.*

*Be sure the battery area is well ventilated (clear of fumes) should it become necessary to connect a jump battery or charger.*

M649

Do not smoke or use an open flame near a battery.

Check for battery leaks before starting maintenance work. Eliminate all leaks before proceeding.

Do not change a battery in a closed area. Provide proper ventilation to guard against an accidental explosion. Leave the battery box open or remove the battery from the unit to increase ventilation.

Never use a metal object to check the battery charge by arcing across the posts.

## Hydraulics Safety



**WARNING:** *Oil under pressure can cause serious cuts or injury.*

M650

Exercise extreme care when working around pressurized hydraulic systems. Do not work on a hydraulic system while the engine is running or pressure is still in the system. Ensure all pressure is relieved from the system before performing maintenance.

Fluid escaping under pressure from a very small hole can be almost invisible and still have enough force to penetrate the skin. Use a piece of cardboard or wood to search for suspected pressure leaks. Do not use your hands. If injured by escaping fluid see a doctor at once. Serious infection or reaction can develop if proper medical treatment is not administered immediately.

Stop the engine and be sure all pressure in the hydraulic system has been relieved before removing panels, housing covers, or caps. Move the control levers back and forth and slowly loosen and retighten hydraulic tank filler caps to relieve trapped pressure. Do this before loosening any hydraulic connections.

When making pressure checks, use the correct gauge for the expected pressure.

## Service Cleanliness

It is extremely important to keep dirt and contaminants out of component parts. Ensure that any parts that are removed are thoroughly cleaned and then covered to keep out unwanted dirt. Keep all new parts in their original containers until you are ready to install them.

If fluid or electrical lines are disconnected, ensure that both mating surfaces are cleaned, covered, and correctly marked. As soon as the line is disconnected, cap, plug or tape both the line and opening. This will ensure proper reconnection and prevent system contamination.

Filters and covers have been provided on the machine to keep the machine systems clean and working at peak efficiency. Keep all panels, filters, and covers installed during operation. Damage to components can occur if exposed to dirt and contaminants.

Perform filter and lubricant replacement at scheduled intervals or earlier. Severe damage can occur if internal components are exposed to dirt and contaminants.

## Removal and Installation

**WARNING:** *Improper maintenance can be hazardous.*



*Read and understand SECTION 1001 - SAFETY AND GENERAL INFORMATION before performing any maintenance, service, or repairs.*

M622

Use a systematic procedure to locate and correct problems.

Find the best checks to verify the cause of the problem and conduct these checks in a logical order.

Do not skip around or perform the checks incompletely. Take the time to perform the checks properly.

Ensure that you tag all components that will not immediately be reinstalled.

If a part resists removal, check to ensure that all fasteners, lines, connectors, and adjacent parts are not interfering with the part being removed.

**WARNING:** *Danger of falling components.*



*Remember, the capacity of an eyebolt diminishes as the angle between the supporting members and the object becomes less than 90 degrees.*

*Eyebolts and brackets must never be bent and should only have stress in tension.*

M645

For heavy components, ensure that a suitable lifting device is used. Never support heavy components by using a lifting device alone. Ensure that a blocking device is installed that can support the full weight of the assembly being worked on. Never leave components suspended from the lifting device for any longer than it takes to install blocking. Do not leave heavy components in a position where they could shift position or fall.

When removing shims, wire the shim pack together and identify on a tag where the shims came from. Keep any shims flat and clean until they are ready for use.

Ensure that the holes in gaskets correspond with the lubricant passages in the mating parts. An improperly placed hole can cause serious damage.

## Disassembly and Assembly

**WARNING:** *Improper maintenance can be hazardous.*



*Read and understand SECTION 1001 - SAFETY AND GENERAL INFORMATION before you perform any maintenance, service, or repairs.*

*Read the specific service procedures for the components you will be working with before beginning repair.*

M651

Ensure that similar subassemblies are kept separate from each other if they are disassembled at the same time. Some parts are especially machined so that they can only be used as a set. These parts are commonly all marked with the same serial number and a letter code, and should be used or disposed of together.

Use all new locking devices when you reassemble a component.

Make sure that all parts are cleaned and thoroughly inspected before being reassembled. This prevents worn or damaged parts that are removed from being reinstalled.

Check to ensure that nothing has been overlooked.

Functionally check the component by operating the circuit or system.

## Hydraulic System and Component Service

Never work on the hydraulic system while the engine is running or when there is still pressure in the system.

**NOTE:** *Dirt in the hydraulic system will lead to premature component failure. A clean, contaminant free system is extremely important to the machine's proper function. Take extra care when working around or on the hydraulic system to ensure its complete cleanliness.*

To keep contamination out of hydraulic system, clean around openings and ports before removing lines or components.

Flush the hydraulic system if you suspect contamination. Contamination of the system can lead to early component failure or possible major system failure.

Inspect all sealing components (O-rings, gaskets, etc.) when disassembling hydraulic components.

Replace all sealing components before reassembly or reinstallation.

Do not force hydraulic lines or tubing into fittings. This may cause cross-threading of the fittings, kinking or bending of lines and hoses, or improper connections that will leak.

Make sure that lines, hoses, and tubing are installed so that they do not rub or chaff on anything.

Inspect lines and hoses periodically for proper placement and for any unusual wear.

## Electrical System

Disconnect the negative battery cable before doing any servicing of the electrical system.

Tag and secure electrical leads after removal to ensure proper reinstallation.

Inspect all wiring for frays, broken connections, damaged leads, and insulation that has worn through before reconnecting it.

Check that correct fuses are installed before testing an electrical system. This will protect the major components from severe damage.

Perform a quick visual check of all electronic gauges before full operation of the material handler. If an incorrect reading occurs, ensure that the gauge is reading correctly before troubleshooting a major component or system.

## GENERAL INFORMATION

This Service Manual has the maintenance and repair instructions for the 689G Telescopic Handler. Functional descriptions are given in each section as an aid to understanding the repair of the major systems of the 689G. Lists for Troubleshooting are included at the end of each section.

The general specifications for the 689G are found at the end of this section. Specific information for a system is also found in the section for that system.

Scheduled maintenance procedures and lubrication requirements are found in the OPERATORS MANUAL.


A troubleshooting chart for each system is found at the end of each section for that system.

A Table of Contents for each section is at the beginning of that section.

The general safety rules are shown on the inside front cover of this service manual. The 689G must be operated according to the instructions in the OPERATORS MANUAL. Additional Warnings are given in the repair sections.

### Product Identification Number Plate (P.I.N.)

P.I.N. number data can be found on the Product Identification Number (P.I.N.) plate. The model number and P.I.N. number on the nameplate should be referenced when ordering parts for the machine and in any correspondence regarding the machine.

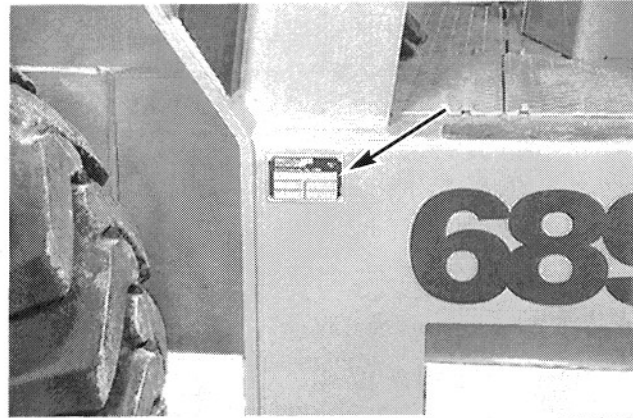

BD98A008



**WARNING:** Indicates an action or condition that can cause injury to the operator or other persons.

M711



**WARNING:** Indicates an action or condition that can cause damage to this machine or other equipment.

M712

# Section 1002

1002

## GENERAL SPECIFICATIONS AND TORQUES

CASE CORPORATION  
700 State Street  
Racine, WI 53404 U.S.A.

CASE CANADA CORPORATION  
450 Sherman Avenue  
Hamilton, ON L8N 4C4 CANADA

Bur 7-88750

© 1999 Case Corporation  
Printed in U.S.A.  
June, 1999

THANK YOU FOR VISITE WITH

[www.repair-manuals.com](http://www.repair-manuals.com)

**DOWNLOAD THIS FULL MANUAL**

**Until download and place it on your computer We care with you ,We really try our best to complete your orders, so your review is very important to us to improve our services**

WE OFFER

ORIGINAL FACTORY MANUALS , WORKSHOP  
MANUALS , SERVICE MANUALS , REPAIR

OUR VISION : 100 % CUSTOMER SATISFACTION,  
AFTER SALE SERVICE AND KEEP IN TOUCH WITH